

INOX | Saladette

SALADETTE ▶ GNI/1 ▶ OPEN TOP

CRQ 93A



| | | | | | |
|--|--|--------------------|--|----------------------------|--|
| | | GAS R290 | | 4 CLIMATIC CLASS | |
| | | | | | |

DETAILS

| | | |
|-------------------------------------------------------|-------------------------------------------------|----------------------------------------------------------------------|
| | | |
| Main switch and digital thermostat fitted as standard | Curved edge for easy cleaning | Engine room lock fitted as standard |
| | | |
| Anti-condensation thermal-braker on door frame | Inner embossed door design for a better sealing | Sliding engine easy to pull out for manageable after sales servicing |
| | | |
| Curved tempered glass with middle shelf | Inner assistance fan | Door design |


GENERAL FEATURES

- GNI/1 Refrigerated saladette (OPEN TOP)
- Stainless Steel exterior and interior
- Static Cooling
- Automatic compressor cycle defrost
- Foaming Agent Cyclopentane (45mm per side)
- Digital Thermostat
- Sliding engine room for a manageable after sales servicing
- Plastic thermal-braker as chamber body frame
- Easy removable condenser filter
- Separated plastic water tray
- Front panel tilted holes for better air circulation
- Adjustable shelves GNI/1: 3 pcs
- Self closing door (New inner embossed design for a better sealing)
- Removable Gasket
- Engine room lock fitted as standard
- N.2 Adjustable feet in the front + N.4 fix rollers
- Holder spacer set (both GNI/3 and GELATO) pans included
- Energy efficiency class: -

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------|----------------------|
| Capacity | 364L |
| Temperature | +0° ~ +8°C |
| Consumption | 4.34 kWh/24h |
| Rated Power | 233 W |
| Noise level | 48 dB(A) |
| Net Weight | 123 Kg |
| Gross Weight | 156 Kg |
| External Dimensions (WxDxH mm) | 1365x700x1295 |
| Internal Dimensions (WxDxH mm) | 1275x586x502 |
| Packaging dimensions (WxDxH mm) | 1420x750x1110 |
| Loading quantities 20'/40'/40'HQ | 12/24/48 |

PRODUCT DIMENSIONS

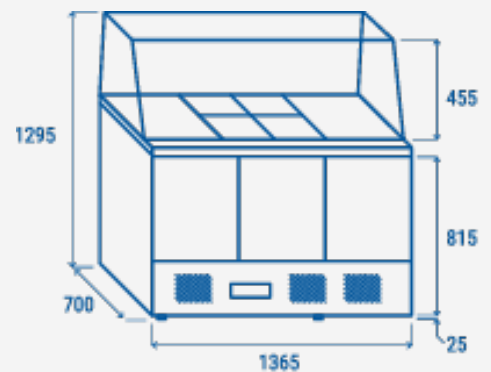

CERTIFICATION

CE RoHS

