

# INOX | Blast Chillers

Blast chillers

# RF 150A



## DETAILS




## GENERAL FEATURES

- GNI/1 and EURONORM 600x400mm Upright Blast chiller
- Stainless Steel exterior and interior
- Ventilated Cooling with Manual defrost
- Plastic thermal-braker as chamber body frame (Heated wire)
- Evaporator with anti-corrosion treatment
- Foaming Agent Cyclopentane (75mm per side - CFC Free)
- Digital Thermostat with Buzzer alarm
- Error message directly in the display
- Chilling chamber in stainless steel
- Door microswitch for stop inner fan with open door
- Prepared for condensation water tray (Not included)
- Reversible door / Needle probe fitted as standard
- Tray configuration: 75mm distance between trays
- Castor with brake
- Temperature controlled or temporized blast cycles (Soft/Hard)
- Automatic storage mode at the end of blast chilling cycle
- ECM/DC Fan (For Low energy consumption/Low noise level)
- Separate button for "ICE CREAM" Cycle
- Separate button for "-40°C" Cycle
- ICE CREAM kit (PANS not included) optional

## TECHNICAL SPECIFICATIONS

Capacity	<b>Ch.45Kg/Fr.35Kg</b>
Temperature	<b>+10°C ~ -40°C</b>
Consumption	<b>N/A kWh/24h</b>
Rated Power	<b>2080 W</b>
Noise level	<b>70 dB(A)</b>
Net Weight	<b>173 Kg</b>
Gross Weight	<b>189 Kg</b>
External Dimensions (WxDxH mm)	<b>790x943x1975</b>
Internal Dimensions (WxDxH mm)	<b>640x452x1245</b>
Packaging dimensions (WxDxH mm)	<b>920x840x1946</b>
Loading quantities 20'/40'/40'HQ	<b>12/28/28</b>

## PRODUCT DIMENSIONS

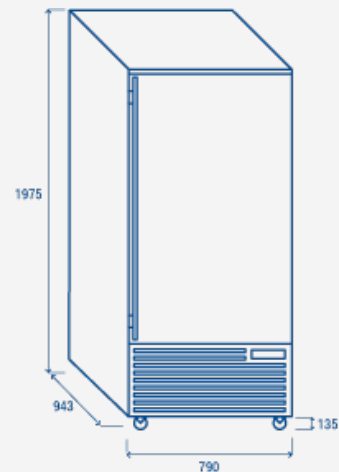

## CERTIFICATION

