

# DISPLAY | Serve Over Counters


REFRIGERATED DISPLAY CABINETS ▶ SERVE OVER COUNTERS ▶ VENTILATED

# WST 200



|                    |       |                    |                 |
|--------------------|-------|--------------------|-----------------|
| GAS<br><b>R290</b> | 40 mm | M2<br>-1°C<br>+7°C | 3<br>+25°C/60RH |
| LED                |       |                    |                 |

## DETAILS

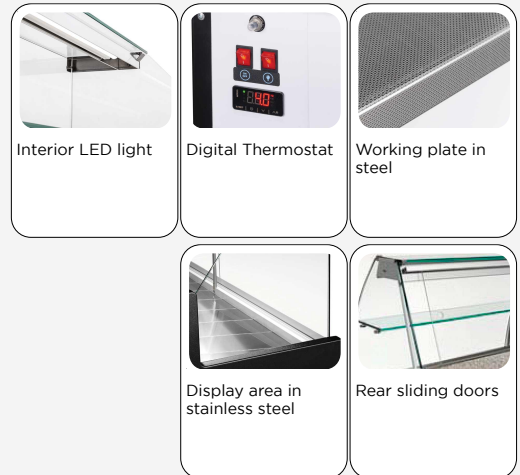

## GENERAL FEATURES

- Serve-over refrigerated counter
- Working plate in steel
- Display area in stainless steel
- Ventilated Cooling
- Evaporator with anti-corrosion treatment
- Automatic compressor cycle defrost
- Digital thermostat with "opening door" and "High temperature" alarm
- Cap in vertical tempered glass
- Glass intermediate shelf not refrigerated
- Interior LED light (with independent switch)
- Insulated tank with water base foaming
- N.4 Adjustable feet
- Energy efficiency class: -

## TECHNICAL SPECIFICATIONS

|                                  |                       |
|----------------------------------|-----------------------|
| Capacity                         | <b>169 L</b>          |
| Temperature                      | <b>M2 (-1°C-+7°C)</b> |
| Consumption                      | <b>7 kWh/24h</b>      |
| Rated Power                      | <b>537 W</b>          |
| Noise level                      | <b>68 dB(A)</b>       |
| Net Weight                       | <b>179 Kg</b>         |
| Gross Weight                     | <b>227 Kg</b>         |
| External Dimensions (WxDxH mm)   | <b>2000x910x1290</b>  |
| Internal Dimensions (WxDxH mm)   | <b>1900x390x220</b>   |
| Packaging dimensions (WxDxH mm)  | <b>2100x1050x1130</b> |
| Loading quantities 20'/40'/40'HQ | <b>10/22/22</b>       |

## CERTIFICATION



## PRODUCT DIMENSIONS

